


# GONLEX



The **GONLEX** rock bolt range features friction bolts with superior product characteristics to meet the most demanding roof support applications. The high load-bearing capacity combined with excellent elongation



properties ensure safer working conditions and faster excavation cycles for low costs. Please refer to specification sheets for detailed product information.

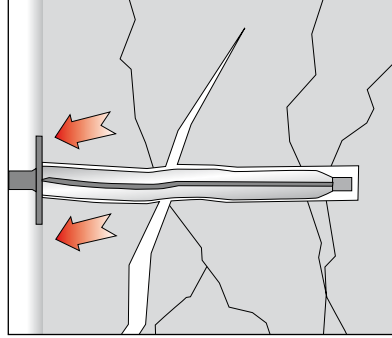

## GONLEX PERFORMANCE

- Original cross-section shape of the **GONLEX** friction bolt when inserted into drill hole.
- Water is pumped into the bolt at 30 MPa expanding the steel tube.
- The water runs out and the bolt is pressed against the rock providing high load friction capacity.



Original cross section shape of The **GONLEX** friction bolt when inserted into the drill hole.

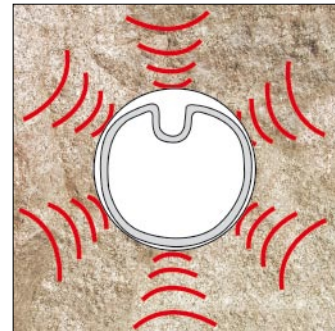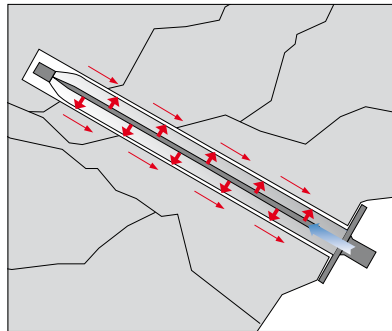

The water runs out and the bolt is pressed against the rock providing high load friction capacity.

## GONLEX BENEFITS:

- simple and easy installation
- immediate full length support for faster excavation cycles and safer working conditions
- excellent elongation properties add to application flexibility
- reliable installation quality
- flexible to variations in drill hole diameter
- adjusts to borehole irregularities
- high deformability in case of ground movements
- intensive for explosion vibrations
- no grouting or use of chemicals needed to avoid contaminations
- manual or mechanical installation at choice


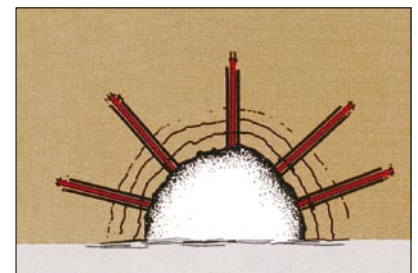
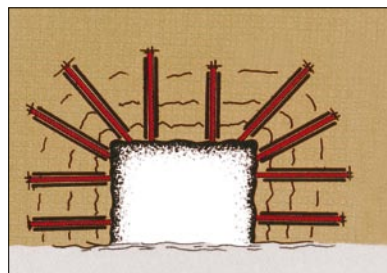


## GONLEX SPECIFICATIONS

The **GONLEX** rock bolts are designed to satisfy the most demanding rock support challenges in the construction and mining industries. The high load capacity combined with excellent elongation properties provide for cost savings and safer working environment.


The **GONLEX** range consists of three products. The **GONLEX STANDARD** for lighter applications with a load capacity of 12 metric tons, **GONLEX MIDI** load capacity of 16 tons and the robust **GONLEX SUPER** with a capacity of 24 metric tons.

TECHNICAL SPECIFICATIONS			
TYPE	STANDARD	MIDI	SUPER
Variable length up to	8000 mm	8000 mm	8000 mm
Tube thickness	2 mm	2 mm	3 mm
Bolt diameter	26 mm	36 mm	36 mm
Original tube	41 mm	54 mm	54 mm
Hole diameter	32-39 mm	43-52 mm	43-52 mm
Optimal hole	35-38 mm	45-51 mm	45-51 mm
Breaking load	120 kN	160 kN	240 kN
Minimum elongation	20%	20%	20%
Typical elongation	30%	30%	30%
Face plate	150*150*6 (*)	200*200*6 (*)	200*200*8 (*)
Face plate hole	30 mm	40 mm	40 mm
Weight	2 kgs/m	2.80 kgs/m	3.80 kgs/m

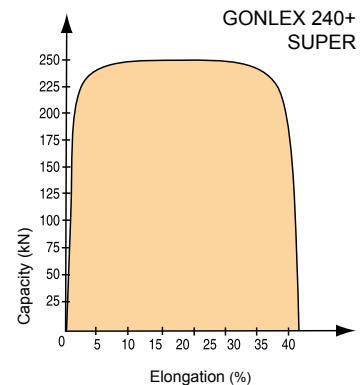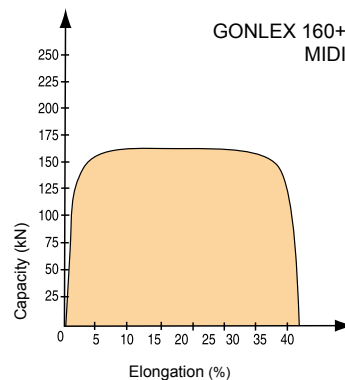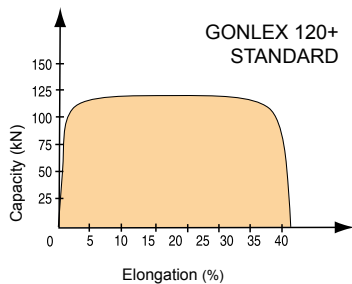

## GONLEX INSERTION SEQUENCE

- Drilling of a bore hole manually or by using a jumbo or a rock bolter
- Insertion of the **GONLEX** friction bolt into the bore hole
- Pumping of water into the **GONLEX** friction bolt until the water pressure reaches 30 MPa.  
The bolt is now secured into place
- Withdrawal of the water pump from the end bushing. Bolting is now completed.

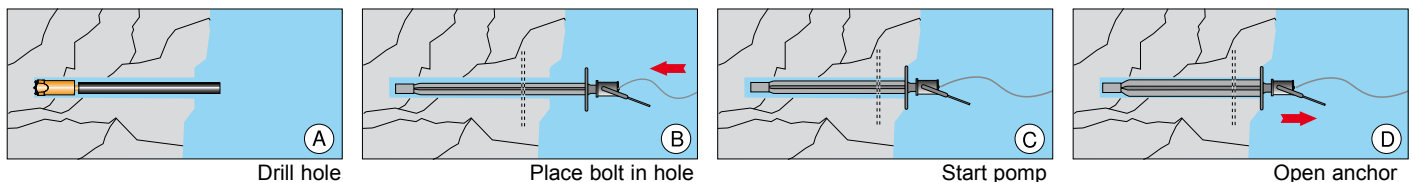

## GONLEX ACCESSORIES

- A full range of pneumatic and electric water pumps
- Robust face plates
- Load tester

## OUR REPRESENTANTS:

### **BOHR-UND ANKERSYSTEME GSI**

Hauptstrasse 124  
85649 Brunnthal  
Deutschland  
Tel: **+49 8104 8893 88 1**  
Fax: **+49 8104 8893 88 2**  
Email: [mirek.palczynski@gonar-systems.com](mailto:mirek.palczynski@gonar-systems.com)

### **GEOTUNNEL S.r.l.**

Tunneling & Foundation Equipment  
Molo Ponte Morosini  
13-16126-Genova  
Italy  
Tel: **+39 010 752701**  
Fax: **+39 010 750603**  
Email: [info@geotunnel.it](mailto:info@geotunnel.it)  
[www.geotunnel.it](http://www.geotunnel.it)

### **DYNATRAC (NIGERIA) LTD.**

Construction & Quarry & Accessories  
3 Oluwole Fadojutimi Street  
Amuwo Odofin Estate Lagos  
Nigeria  
Tel: **+234 1470 7448**  
Fax: **+234 1545 7488**  
Email: [dynatrac@beta.linkserve.com](mailto:dynatrac@beta.linkserve.com)

### **C.I ENTRELINK S.A**

Edificio Nueva Granada Calle 72  
No 13-23 Piso 9  
Bogota  
Colombia  
Tel: **+57 1540 17 00**  
Fax: **+57 1540 17 17**  
Email: [contactenos@entrelink.com.co](mailto:contactenos@entrelink.com.co)

### **NETIS d.o.o.**

10000 Zagreb,  
Bartolići 45  
Croatia  
Tel: **+385 1 38 30 443**  
Fax: **+385 1 36 45 938**  
Email: [neven.hadziomerspahic@zg.htnet.hr](mailto:neven.hadziomerspahic@zg.htnet.hr)

### **TASUM - GONAR s.r.o.**

Štrkova 10  
010 09 Žilina  
Slovakia  
Tel: **+421 41 700 33 03**  
Fax: **+421 41 763 72 93**  
Email: [tasum@tasum.sk](mailto:tasum@tasum.sk)  
[www.tasum.sk](http://www.tasum.sk)

### **GONAR BULGARIA Ltd**

18, Parva Bulgarska Armia Str.  
PO Box 54  
BG 1220 Sofia  
Bulgaria  
Tel: **+359 2 83 25 160**  
Fax: **+359 2 83 25 169**  
Email: [info@gonar-bg.com](mailto:info@gonar-bg.com)

### **ERKOM KOMPRESÖR MAKİNA**

**İMALAT SAN.VE TİC.LTD.ŞTİ**  
Alinteri Bul. 17. Cad. 29/E  
06370 Ostim - Ankara  
Turkey  
Tel: **+90 312 354 93 00**  
Fax: **+90 312 354 93 10**  
Email: [erkom@erkom.com.tr](mailto:erkom@erkom.com.tr)  
[www.erkom.com.tr](http://www.erkom.com.tr)

### **MICROFOR sarl**

Avenue de Tourbillon 100  
Case postale 505  
CH-1951 Sion  
Switzerland  
Tel: **+41 27 323 42 70**  
Fax: **+41 27 323 42 71**



GONAR - Systems International Ltd.  
109 Obroki Str., 40-833 KATOWICE, POLAND  
tel. +48 32/207 12 93-5, fax +48 32 207 12 96  
e-mail: [info@gonar-systems.com](mailto:info@gonar-systems.com)  
[www.gonar-systems.com](http://www.gonar-systems.com)